



ASM 192 T, 20 m³/h, remote control in mbar l/s, German language, 200/240 V and German power cable




Similar Image

ASM 192 T, 20 m³/h, remote control in mbar l/s, German language, 200/240 V and German power cable

- Powerful rotary vane pump with 20 m³/h backing capacity
- 4.4 l/s helium pumping speed
- 200/240 V operating voltage
- German power cable
- Voice synthesizer in German
- Remote control in mbar l/s

Dimensions

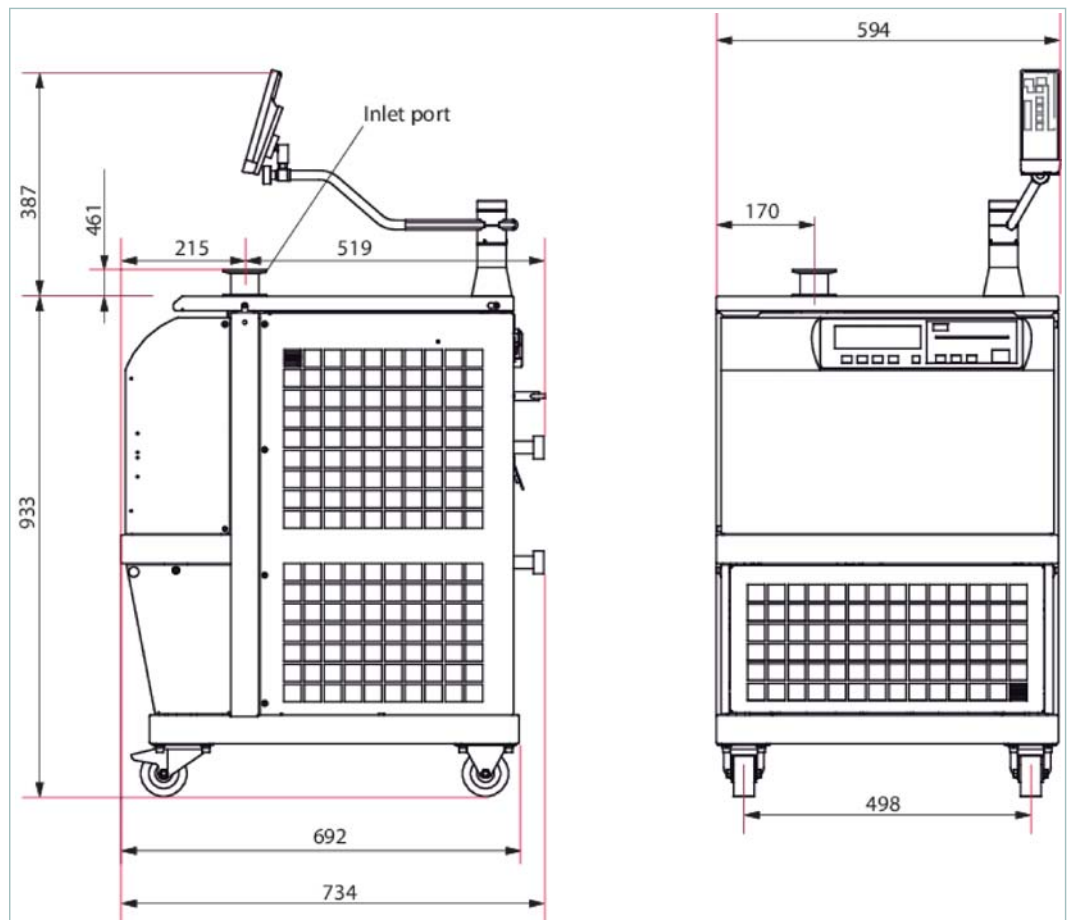

Technical Data

ASM 192 T, 20 m³/h, remote control in mbar l/s, German language, 200/240 V and German power cable

| | |
|------------------------|--|
| Backing pump | with oil sealed backing pump |
| Backing pump capacity | 20 m ³ /h |
| Detectable gases | ⁴ He |
| Dimensions (L x W x H) | 594 x 692 x 933 mm |
| Flange (in) | DN 40 ISO-KF |
| I/O interfaces | Digital inputs (Start, Vent, Calibration...); Digital outputs (Test modes, cycle in progress, helium signal above reject set point...); Analog outputs (Helium signal log, Inlet pressure) |
| Interface | RS-232 |
| Language | German |

| Technical Data | ASM 192 T, 20 m ³ /h, remote control in mbar l/s, German language, 200/240 V and German power cable |
|---|--|
| Mains cable | German power cable |
| Max. inlet test pressure | 6 hPa |
| Minimum detectable leak rate for helium (sniffing leak detection) | 1 · 10 ⁻⁸ Pa m ³ /s |
| Minimum detectable leak rate for helium (vacuum leak detection) | 5 · 10 ⁻¹³ Pa m ³ /s |
| Noise level | 54 dB(A) |
| Operating temperature | 10 - 40 °C |
| Pumping speed for He | 4.4 l/s |
| Start-up time (20°C) with calibration | 4.5 min |
| Start-up time (20°C) without calibration | 3 min |
| Supply | 200-240 V, 50/60 Hz |
| Test method | Vacuum and sniffing leak detection |
| Type | High Performance - Console |
| User interface | Graphic color touch screen |
| Weight | 125 kg 275.57 lb |

| Order number | |
|---------------------------------|---------------------|
| ASM 192 T, 20 m ³ /h | D40R0S0MC860 |

| Accessories | |
|--|-----------------|
| Helium spray gun | |
| Helium spray gun, standard | 112535 |
| Helium spray gun "Elite-Kit", spray gun with additionnal accessories in a compact case | 109951 |
| Inlet filters | |
| Inlet filter, 20 µm, DN 40/40 ISO-KF | 105842 |
| Sniffer probe | |
| Sniffer probe, 5 m hose length, flexible 15 cm nozzle | SNC1E3T1 |
| Sniffer probe, 5 m hose length, rigid 9 cm nozzle | SNC1E1T1 |

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**