



DCU 400, Display control unit incl. power supply pack 19"




Similar Image

DCU 400, Display control unit incl. power supply pack 19"

- For power supply, control and operation of appropriate Pfeiffer Vacuum products
- With integrated power supply
- Ideal for use with HiPace 400–800 with TC 400 and HiPace 300–800 M with TM 700
- Connection of Pfeiffer Vacuum ActiveLine gauges possible
- Interface cable (3 m) for drive electronics included in scope of delivery

Dimensions

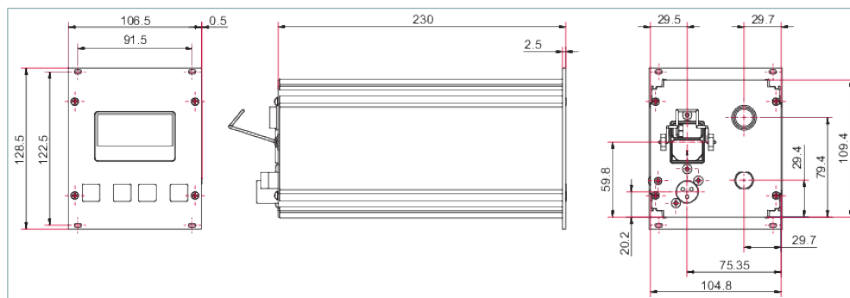

A	227.5 mm
B	230 mm
C	128.5 mm
D	111.2 mm
E	106 mm
F	106.4 mm

Technical Data	DCU 400, Display control unit incl. power supply pack 19"
Ambient temperature	5-50 °C 41-122 °F 278-323 K
Mains requirement: frequency (range)	50/60 Hz
Mains requirement: power consumption	450 VA
Mains requirement: voltage (range)	115–230 (-20-+15 %) V AC
Output current	8.4 A
Output voltage	48 (± 2 %) V DC
Power consumption max.	450 VA
Power supply	DCU 400
Protection category	IP20
Weight	2.3 kg 5.07 lb

Order number	
DCU 400	PM C01 823

Accessories	
Cables Mains cables / Power cords	
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE
Mains cable 208 V AC, NEMA 6-15 to C13, 3 m	P 4564 309 ZF

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**